

06-23-00

A

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	ACC0786P1US
	First Inventor or Application Identifier	Trevor Hamilton
	Title	FOULING INHIBITION
	Express Mail Label No.	EM122069144US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Specification [Total Pages 37] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. <input type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets] 4. Oath or Declaration (unsigned) [Total Pages 3] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input checked="" type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) * Small Entity 13. <input type="checkbox"/> Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:	
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).	

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: PCT / GB98/03883
 Prior application information: Examiner Group / Art Unit:
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Joan M. McGillicuddy		
	Akzo Nobel Inc.		
Address	Intellectual Property Department 7 Livingstone Avenue		
City	Dobbs Ferry	State	New York
		Zip Code	10522-3408
Country	U.S.A.	Telephone	914-674-5463
		Fax	914-693-4236

Name (Print/Type)	Joan M. McGillicuddy	Registration No. (Attorney/Agent)	35.608
Signature	<i>Joan M. McGillicuddy</i>	Date	6/22/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

PATENT

Express Mail Label No.: EM122069144US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: :
: :
HAMILTON, T., et al. : Docket: ACC 0786 P1US
: :
US Serial No.: Unassigned : Examiner:
: :
Int'l App. No.: PCT/GB98/03883 : Group Art:
Int'l Filing Date: December 23, 1998 :
: :
For: FOULING INHIBITION : Dated: June 21, 2000

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Preliminary to examination, applicants request the following amendments be entered in this application.

IN THE SPECIFICATION

Page 1, after the title please insert:

-- -- The present invention is a continuation International Patent Application No. PCT/GB98/03883, filed on December 23, 1998 and claimed priority of Great Britain Application No. 9727261.1, filed on December 23, 1997.--

--FIELD OF THE INVENTION--;

Page 1, after line 5, please insert the following:

--BACKGROUND OF THE INVENTION--;

Page 3, after line 23, please insert the following:

--SUMMARY OF THE INVENTION--;

Page 3, line 27, please delete the following:

"said";

Page 3, line 32, please delete the following:

"said";

Page 4, after line 13, please insert the following:

--DETAILED DESCRIPTION OF THE INVENTION--;

Page 7, line 18, please delete the following:

"said";

Page 9, line 1, please delete the following:

"said";

Page 11, line 7, after "a preferred form of" please insert the following:

--the--;

Page 12, line 23, please delete the following:

"The or each";

Page 12, line 23, before the word "curable", please insert the following:

--Each--;

Page 15, line 1, before the word "curable" second occurrence, please insert the following:

--silanol or silicon-alkoxy groups, or--;

Page 17, line 35, please delete the following:

"The or each";

Page 17, line 35, before the word "halogen", please insert the following:

--Each--.

IN THE CLAIMS


1. (Amended) A process for inhibiting the fouling of a substrate in a fouling environment, which comprises forming on the substrate, before exposure to the [said] environment, a coating comprising a film-forming polymer(A) carrying unreacted curable silicon-containing functional groups providing latent reactivity, and thereafter applying a layer comprising a curable polymeric fouling-inhibiting material (B) and bonding the

applied layer to the [said] coating by a condensation curing reaction involving the unreacted functional groups thereon.

2. (Amended) A process [as claimed in] according to claim 1, wherein the curable silicon-containing functional groups of (A) are pendant functional groups.


3. (Amended) A process [as claimed in] according to claim 1 [or 2], wherein the silicon-containing functional groups are curable by virtue of one or more curable functional groups selected from the group consisting of aliphatic, aromatic and araliphatic ether and oxime groups, which groups may be substituted or unsubstituted.

4. (Amended) A process [as claimed in] according to claim 1 [or claim 2], wherein the curable silicon-containing functional groups are groups of the formula



in which the groups represented by R_1 , R_2 , and R_3 may be the same or different and each may comprise an ether or ester group, preferably a group including a straight-chain or branched alkyl moiety having from 1 to 4 carbon atoms, and in which one or two of R_1 to R_3 may represent hydrogen or hydrocarbon group, preferably a straight-chain or branched alkyl group having from 1 to 4 carbon atoms.

5. (Amended) A process [as claimed in] according to claim 1 [or claim 2], wherein the silicon-containing functional groups are curable by virtue of one or more oxime groups of the formula



in which R^4 and R^5 may be the same or different and each represents a straight-chain or branched, saturated or unsaturated, aliphatic hydrocarbon radical, preferably having up to 7 carbon atoms, more especially up to 4 carbon atoms, especially a methyl or ethyl group; an aromatic group, for example, a phenyl group; or an araliphatic group, for

example, a benzyl group; or R⁴ and R⁵ together represent an alkylene group; or one of R⁴ and R⁵ represents hydrogen.

6. (Amended) A process [as claimed in] according to claim 1 [or claim 2], wherein the curable silicon-containing functional groups are trimethoxy silyl or methyl dimethoxysilyl groups.

7. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 6], wherein the polymer (A) has no silanol or amine functionality.

8. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 7], wherein the polymer (A) carries no functional groups other than the curable silicon-containing functional groups conferring latent reactivity.

9. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 8], wherein at least a major proportion of the repeating units in the film-forming polymer (A) are other than siloxane repeating units.

10. (Amended) A process [as claimed in] according to claim 9, wherein the proportion of siloxane repeating units in the film-forming polymer (A) is not more than 25%, preferably not more than 10%, and more especially not more than 5%.

11. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 10], wherein the polymer (A) is substantially free from siloxane repeating units.

12. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 11], wherein the polymer (A) is derived from one or more monomers (A1) which carry curable silicon-containing functional groups and one or more monomers (A2) which do not carry such groups.

13. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 12], wherein the polymer (A) is derived from one or more ethylenically unsaturated monomers.

14. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 13], wherein the Tg of the polymer (A) is above ambient temperature.

15. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 14], wherein the polymer (A) has a number-average molecular weight in the range of from 3,000 to 10,000.

16. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 15], wherein the unreacted curable silicon-containing functional groups provide a period of latent reactivity of 48 hours or more.

17. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 16], wherein the fouling-inhibiting material (B) is curable by virtue of silanol or silicon-alkoxy groups.

18. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 16], wherein the fouling-inhibiting material (B) is curable by virtue of curable functional groups selected from the group consisting of aliphatic, aromatic and araliphatic ether, ester and oxime groups, trialkoxysilyl or hydrosilyl groups.

19. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 18], wherein the fouling-inhibiting material (B) is a linear polymer.

20. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 19], wherein the fouling-inhibiting material comprises a curable polysiloxane.

21. (Amended) A process [as claimed in] according to claim 20, wherein the polysiloxane (B) has the structure $R^3O(SiR^1R^2O)_nR^3$, in which R^1 and R^2 , which may be the same or different on each silicon atom and on different silicon atoms in the polymer, each represents an alkyl group; an alkenyl group; a cycloalkyl or cycloalkenyl group; an aryl group; or a halogenated or cyano-substituted hydrocarbon group, with the proviso that one of R^1 and R^2 may represent hydrogen on some or all of the silicon atoms and that R^1 and R^2 may each represent hydrogen on some of the silicon atoms, OR^3 represents a curable functional group in which R^3 represents a monovalent radical; and n represents a degree of polymerisation.

22. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 19], wherein the fouling-inhibiting material comprises a curable fluorine-containing polymer.

23. (Amended) A process [as claimed in] according to claim 22, wherein the fluorine-containing polymer comprises a fluoro-acrylate polymer.

24. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 23], wherein the fouling-inhibiting material (B) has a number-average molecular weight in the range of from 5,000 to 85,000.

25. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 24], wherein the fouling-inhibiting material (B) is applied in admixture or conjunction with a catalyst for the condensation curing reaction.

26. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 25], wherein the fouling-inhibiting material (B) is applied in admixture or conjunction with a cross-linking agent for the condensation curing reaction.

27. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 26], wherein the substrate has a worn or damaged anti-fouling coating thereon.

28. (Amended) A process [as claimed in any one of] according to claim[s] 1 [to 27], wherein the fouling environment is an aquatic environment.

29. (Amended) A process [as claimed in] according to claim 28, wherein the fouling environment is a marine environment.

30. (Amended) A substrate in a fouling environment and bearing a coating and a cured fouling-inhibiting layer thereon, more especially a cured polysiloxane layer, formed by a process [as defined in any one of] according to claim[s] 1 [to 29].

IN THE ABSTRACT

Please add the following abstract on a separate page following the claims:


--ABSTRACT

A process for inhibiting the fouling of a substrate in a fouling environment, which comprises forming on the substrate, before exposure to the environment, a coating comprising a film-forming polymer (A) carrying unreacted curable silicon-containing functional groups providing latent reactivity, and thereafter applying a layer comprising a curable polymeric fouling-inhibiting material (B), more especially a curable polysiloxane or a curable fluorine-containing polymer, and bonding the applied layer to the coating by a condensation curing reaction involving the unreacted functional groups thereon. The initial coating can be applied over a range of worn or damaged anti-fouling coatings. The sequential application of layers is a simpler, more flexible and more controllable procedure than is offered by complex systems designed to produce outer siloxane-rich regions. Relatively long periods are achievable.--

REMARKS

The present Preliminary Amendment amends the specification, claims and abstract in accordance with U.S. practice without the addition of new matter thereby. Applicants respectfully request that the above amendments be entered and be given early and favorable consideration.

Respectfully submitted,

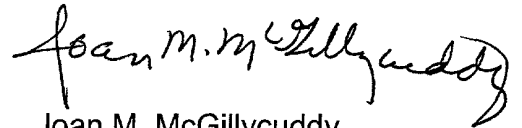

Joan M. McGillicuddy
Attorney for Applicants
Registration No. 35,608
Lainie E. Parker
Attorney for Applicants
Registration No. 36,123

Akzo Nobel Inc.
Intellectual Property Dept.
7 Livingstone Avenue
Dobbs Ferry, New York 10522-3408
(914) 674-5466

FOULING INHIBITION

5 This invention relates to a process for inhibiting fouling of a substrate in a fouling environment, more especially a marine or other aquatic environment.

10 Man-made structures such as boat hulls, buoys, drilling platforms, oil production rigs and pipes which are immersed in water are prone to fouling by aquatic organisms such as green and brown algae, barnacles, mussels and the like. Marine structures are commonly of metal, but may also comprise other structural materials such as concrete. For smaller boats, the hulls may instead comprise, for example, wood or a fibre-reinforced resin. This fouling is a nuisance on boat hulls, because
15 it increases the frictional resistance towards movement through the water, with the consequence of reduced speeds and increased fuel costs. It is a nuisance on static structures such as the legs of drilling platforms and oil production rigs, firstly because the resistance of thick layers of fouling to waves and currents can cause
20 unpredictable and potentially dangerous stresses in the structure, and, secondly, because fouling makes it difficult to inspect the structure for defects such as stress cracking and corrosion. It is a nuisance in pipes
25 such as cooling water intakes and outlets, because the effective cross-sectional area is reduced by fouling, with the consequence of reduced flow rates.

The commercially most successful methods of inhibiting fouling have involved the use of anti-fouling
30 coatings containing substances toxic to aquatic life, for example tributyltin chloride or cuprous oxide. Such coatings, however, are being regarded with increasing disfavour because of the damaging effects such toxins can have if released into the aquatic environment. There
35 is accordingly a need for non-fouling coatings which do not contain markedly toxic materials.

It has been known for many years, for example, as disclosed in GB 1 307 001 and US 3 702 778 that silicone rubber coatings resist fouling by aquatic organisms. It is believed that such coatings present a surface to which the organisms cannot easily adhere, and they can accordingly be called non-fouling rather than anti-fouling coatings. Silicone rubbers and silicone compounds generally have very low toxic properties. Silicone rubber coatings have, however, gained little commercial acceptance. It is difficult to make them adhere well to the substrate surface that is to be protected, and they are mechanically rather weak and liable to damage.

EP 0 032 597 discloses that silicone polymers onto which organic polymeric segments are grafted may be vulcanised to form non-fouling coatings. The vulcanisation procedure may utilise a crosslinking agent such as tetraethyl orthosilicate and a catalyst such as a tin salt.

GB 2 188 938 discloses that vinylic polymers containing polymeric silicone side chains may be used to form thermoplastic non-fouling coatings.

GB Patent Application 2 192 400 discloses anti-fouling paint compositions which comprise a vinylic copolymer obtained by copolymerisation of:

- (a) 1-50% by weight of a polymerisable unsaturated polysiloxane compound;
- (b) 0-30% by weight of a polymerisable unsaturated alkoxysilane compound; and
- (c) 20-99% by weight of a polymerisable unsaturated vinyl monomer other than (a) or (b).

The disclosed anti-fouling paint compositions may also comprise a hydroxyalkyl-tipped poly(diorganosiloxane) to the extent of 1-50 parts by weight per 100 parts by weight of the vinylic copolymer. The vinylic copolymer and the poly(diorganosiloxane) are not curable one with the other, and the coatings disclosed in GB-A-2 192 400

are thermoplastic and not vulcanised.

Coatings which contain a chemically inert oil or grease, often called a slipping agent, have been reported to offer improved resistance to fouling. GB 1 470 465
5 discloses the use of silicone oils as slipping agents in a vulcanised silicone rubber formulation. GB 1 581 727 discloses the use of silicone-free organic compounds, for example polyolefins with a molecular weight up to about 5000, as slipping agents in a vulcanised silicone rubber
10 formulation.

WO 93/13179 discloses a composition for fouling inhibition which comprises (A) a functional-group containing polymer having no more than a minor proportion of siloxane repeating units and (B) a polysiloxane which
15 is curable with the polymer (A). After application of the composition to a substrate and curing, the innermost region of the resulting coating generally comprises no more than a minor proportion of siloxane material whereas the coating presents a siloxane-rich surface layer to the
20 external environment. As a result, the coating provides fouling inhibition properties whilst at the same time the problems of mechanical weakness of previously proposed silicone rubber coatings are alleviated or avoided.

The present invention provides a process for
25 inhibiting the fouling of a substrate in a fouling environment, which comprises forming on the substrate, before exposure to the said environment, a coating comprising a film-forming polymer (A) carrying unreacted silicon-containing functional groups providing latent
30 reactivity, and thereafter applying a layer comprising a curable polymeric fouling-inhibiting material (B) and bonding the applied layer to the said coating by a condensation curing reaction involving the unreacted functional groups thereon.

35 The invention further provides a substrate bearing a coating which has been applied by the process, i.e.,


having an outer layer comprising cured component (B).


An especially important aspect of the present invention comprises inhibition of fouling of structures in aquatic and, in particular, marine environments, especially the hulls of boats and ships of all sizes.

The curable polymeric fouling-inhibiting material (B) carries functional groups capable of condensation curing with the unreacted silicon-containing functional groups on the initial coating comprising the film-forming polymer (A). The material (B) advantageously comprises a curable polysiloxane, but other curable polymeric materials, especially fluorine-containing polymers, for example, fluoro-acrylate polymers, may be used.



The invention is described hereinafter with particular reference to the preferred case in which the material (B) comprises a curable polysiloxane, but it will be appreciated that similar considerations apply in the case of other materials. Thus, in broad concept, the invention comprises the provision of an initial coating which, after application, carries unreacted silicon-containing functional groups which provide latent reactivity for subsequent curing with the curable polymeric fouling-inhibiting material (B).

The condensation curing reaction between the silicon-containing functional groups on the initial coating and a curable polysiloxane may proceed, for example, as follows:

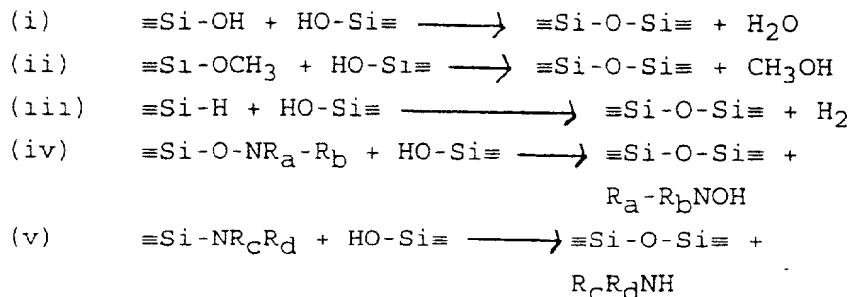



5



may hydrolyse to an aldehyde or ketone, $\text{R}^1\text{R}^2\text{CO}$ and
 10 hydroxylamine, NH_2OH , under the conditions of the
 condensation.


The film-forming polymer (A) may comprise pendant
 and/or terminal curable functional groups. Pendant
 curable functionality is preferred, for example, in the
 15 case where the polymer is derived from one or more
 ethylenically unsaturated monomers, and terminal curable
 functionality is preferred, for example, if the polymer
 (A) is polyurethane, epoxy or polyester based.

The silicon-containing curable groups may be mono-,
 20 di- or tri-functional. In the case of di- or tri-
 functional groups, it is in general not necessary to
 provide a separate cross-linking agent for the curing
 reaction with the polysiloxane (B).

Advantageously, the curable silicon-containing
 25 groups are curable by virtue of one or more curable
 functional groups selected from aliphatic, aromatic and
 araliphatic ether (for example, methoxy) and oxime
 groups. Although the silicon-containing functional
 groups can in principle be curable by virtue of ester
 30 groups, there may be difficulties in obtaining the
 desired period of latency in the case of ester groups
 comprising relatively short-chain hydrocarbon moieties
 (say, up to C_3 or C_4). Mention may also be made of
 silicon-containing functional groups which are curable by
 35 virtue of groups other than epoxy groups.

Preferably, the curable silicon-containing


functional groups are groups of the formula



in which the groups represented by R_1 , R_2 and R_3 may be the same or different and each may comprise an ether or ester group, preferably a group including a straight-chain or branched alkyl moiety having from 1 to 4 carbon atoms, and in which one or two of R_1 to R_3 may represent hydrogen or a hydrocarbon group, preferably a straight-chain or branched alkyl group having from 1 to 4 carbon atoms.

Examples of preferred silicon-containing functional groups are trimethoxy silyl and methyl dimethoxysilyl.

Other preferred silicon-containing functional groups comprise one or more oxime groups of the formula



in which R^4 and R^5 may be the same or different and each represents a straight-chain or branched, saturated or unsaturated, aliphatic hydrocarbon radical, preferably having up to 7 carbon atoms, more especially up to 4 carbon atoms, especially a methyl or ethyl group; an aromatic group, for example, a phenyl group; or an araliphatic group, for example, a benzyl group; or R^4 and R^5 together represent an alkylene group; or one of R^4 and R^5 represents hydrogen. Preferably each of R^4 and R^5 is other than an aromatic group. A group R^4 and/or R^5 may be substituted or unsubstituted.

Preferably, the silicon-containing functional groups do not contain any amine functionality, and preferably also no silanol functionality; each of those functionalities tends to detract from the desired latent reactivity.

Preferably, the film-forming polymer does not contain any functional groups apart from those conferring the desired latent reactivity. If any other functional

groups are present, care must be taken to ensure that such additional groups do not detract from the desired latent reactivity. Examples of functional groups which may interfere in this way are acid functionalities and amine (including imine) and other base functionalities. Such interfering groups should be avoided both in the film-forming polymer and in the coating formulation used to apply the polymer.

Preferably, pendant curable silicon-containing functional groups in (A) are connected to the polymer by a chemical linkage that is resistant to aqueous hydrolysis in natural waters; sea water, for example, has pH 8.0-8.3. The silicon-containing bonds which are capable of undergoing condensation curing as described above, for example silyl ether and silyl ester, are therefore generally unsuitable for the purpose of attaching silicon-containing groups to the polymer backbone. It is preferred that the said chemical linkage should contain silicon directly linked to carbon. For example, the chemical linkage may comprise an alkylene group C_nH_{2n} where n is a non-zero integer preferably having the value 1-5, an alkylidene group, or an arylene group, for example phenylene, or may be a direct chemical bond to a carbon atom in the polymer backbone.

The film-forming polymer may be derived from one or more ethylenically unsaturated monomers, more especially from one or more ethylenically unsaturated monomers selected from unsaturated aliphatic hydrocarbons, for example, ethylene, propylene and butylene; unsaturated halogenated hydrocarbons, for example, vinyl chloride, vinyl fluoride, vinylidene chloride and vinylidene fluoride; vinyl aromatic compounds, for example, vinyl pyridine, vinyl naphthalene, and styrene (including ring-substituted styrenes); unsaturated esters, amides and nitriles; and N-vinyl compounds, for example, N-vinyl pyrrolidone, N-vinyl carbazole and N-vinyl caprolactam.

Mention should also be made of polyvinylacetate and polyvinylalcohol.



As further possibilities, the film-forming polymer may comprise repeating units derived from urethanes, ureas, urethane-ureas, amides, imides, amide-imides, epoxy compounds, and esters. Mention should also be made of alkyl resins and polyethers.

As particular examples of olefinic monomers may be mentioned such compounds as acrylic and methacrylic esters, amides and nitrile derivatives, styrene and vinyl chloride. Acrylate and methacrylate esters are preferred monomers, especially those derived from saturated alcohols containing 4-16 carbon atoms, such as the butyl, hexyl, octyl, decyl, dodecyl and hexadecyl esters. Mention should also be made of isobornyl acrylate and isobornyl methacrylate.

Advantageously, the polymer of (A) is derived from one or more monomers (A1) which carry curable silicon-containing groups and one or more monomers (A2) which do not carry such groups. In the case of monomer(s) (A1) carrying pendant curable silicon-containing groups, the molar proportion of monomer(s) (A1) to that of monomer(s) (A2) may be in the range of from 5% to 25%, typically at least 8% or 12% and usually not exceeding 20%. The preferred range is dependent principally on the nature of the latent functional groups, the latency period desired, and the nature of the polymer backbone.

Polymers (A) carrying curable silicon-containing groups may expediently be manufactured by the polymerization of one or more monomers containing such groups, advantageously with one or more comonomers which do not contain such groups. For example, such silicon-containing monomers may be derivatives of compounds such as acrylic acid, methacrylic acid, styrene, or ethylene. Examples of derivatives of acrylic and methacrylic acid are the esters in which the esterifying group includes

the said silicon-containing group. As particular examples of such derivatives there may be mentioned 3-(trimethoxysilyl)propyl acrylate and methacrylate (I) and 3-(dimethyl(trimethoxysilyloxy)silyl)propyl acrylate and methacrylate (II) (Me represents \equiv methyl).



Compound I (R represents CH_3) is particularly preferred ("TMSPM").

Examples of derivatives of styrene as monomers (A1) are those in which a benzene ring is substituted both with a vinyl or 2-propenyl group and with a silicon-containing group. As particular examples of styrene derivatives there may be mentioned the isomeric trimethoxysilylstyrenes and the isomeric 2-(trimethoxysilyl-ethyl)styrenes. As examples of derivatives of ethylene as monomers (A1) may be mentioned trimethoxyvinylsilane and triethoxyvinylsilane.

Instead of using monomers (A1) which already carry curable silicon-containing groups, it is possible (but less preferred) to graft such groups, for example trimethoxysilyl groups, onto a preformed polymer carrying suitable reactive sites at which the curable silicon-containing groups can be attached.

Thus, for example, trimethoxysilyl and methyl dimethoxysilyl functional groups may be incorporated by reaction of the corresponding mercaptopropyl silane with epoxy groups.

It may also be advantageous to utilise two or more different comonomers not containing a curable silicon group, for example a C_{1-4} alkyl acrylate or methacrylate ester together with a C_{6-16} acrylic or methacrylic ester. Thus, for example, in another preferred embodiment, polymer (A) is derived from the following monomers in

the following molar proportions:

	TMSPM	10%
	Lauryl or butyl acrylate 20%)	
)	90%
5	Methyl methacrylate 70%)	

The following general considerations are relevant in determining a suitable composition for the film-forming polymer having unreacted functional groups conferring latent reactivity:

- 10 i) Increasing the content of functional groups will generally increase the cost of the polymer material and will tend to decrease its storage stability, but tends to increase the period of latency when the polymer material has been applied to the substrate.
- 15 ii) The Tg of the polymer should be above room temperature and, in general, increasing Tg will lead to improved barrier performance of the coating and to an extended period of latency. It may be noted, however, that if the Tg is too high there may be interference with the subsequent curing reaction with the polysiloxane or other curable material (B), although the effect of this can in principle be reduced by increasing the content of silicon-containing functional groups. It will be appreciated that the Tg of the polymer can be varied by suitable choice of monomers and monomer proportions.
- 25 iii) The preferred minimum content of silicon-containing functional groups in the polymer (A) in the initial coating formulation will depend, inter alia, on the reactivity of the groups concerned. Thus, for example, trimethoxysilyl groups will tend to be more reactive than methyl dimethoxysilyl groups, and each will tend to be more reactive than the corresponding propoxy groups (which will normally be isopropoxy groups).
- 30 Although the film-forming polymer may include a
- 35

proportion of siloxane repeating units, advantageously at least a major proportion of the repeating units, and preferably at least 55% of the units, are other than siloxane units. The proportion of siloxane repeating units is advantageously not more than 25%, preferably not more than 10%, and more especially not more than 5%. In a preferred form of composition, the polymer of component (A) is substantially free of siloxane repeating units.

The film-forming polymer may have a number-average molecular weight in the range of from 1 000 to 50 000, preferably up to 15 000, more especially from 3000 to 10 000.

If appropriate, a chain transfer agent may be used in the production of the film-forming polymer (A). As examples of chain transfer agents there may be mentioned 1-dodecanethiol and mercapto-propyltrimethoxysilane. The molecular weight of the polymer may also be controlled by varying the content of polymerisation initiator. Examples of preferred free-radical initiators include organic peroxides such as tert-butyl peroxy-2-ethylhexanoate (available under the trade name Trigonox 215) and the materials available under the trade names Trigonox 27 and Trigonox 41-C 75.

It will be appreciated, from the requirement for the initial coating to have unreacted functional groups providing latent reactivity, that the initial coating formulation should not include any cross-linking agent or curing catalyst, nor indeed any other material which may detract unduly from the desired latency (for example, acids, bases, organic metal salts, water or other protic solvents). The initial coating should be formulated so as to behave generally as a thermoplastic material during the period of latency, with only a minimum of self-curing taking place. The initial film formation takes place by solvent evaporation rather than by a curing reaction.

The practical minimum period of latency will depend

in turn on the desired or necessary minimum interval between application of the initial coating and subsequent application of the curable polysiloxane. In general it is considered that a minimum latency period of 2 hours under the prevailing conditions will be needed, but there will be circumstances requiring a minimum of 12, 24 or 48 hours, a week, a month or even longer. Factors influencing the latency period have been outlined hereinbefore.

The latency period for any given coating can be determined using a standard overcoating test under specified conditions of temperature and humidity. Test portions of the curable polysiloxane material are applied at a series of different time intervals to different test areas of an initially coated substrate and cured onto the initial coating. The latency period is identified as the maximum time interval (after application of the initial layer) at which satisfactory adhesion of the coating (B) is still achieved.

In practical operation, the coating (B) can be applied at any time before expiry of the latency period for the initial coating used.

The or each curable polysiloxane applied according to the invention as material (B) to the initial coating having latent reactivity may be an organohydrogen-polysiloxane or a polydiorganosiloxane. The polysiloxane may, for example, comprise a copolymer of diorganosiloxane units with organohydrogen siloxane units and/or with other diorganosiloxane units, or a homopolymer of organohydrogen siloxane units or of diorganosiloxane units.

Mention may also be made of polysiloxanes which comprise one or more other co-monomers in addition to siloxane repeating units. Such polysiloxanes may be derived from siloxane units and one or more ethylenically unsaturated monomers, more especially one or more

ethylenically unsaturated monomers selected from unsaturated aliphatic hydrocarbons, for example, ethylene, propylene and butylene; unsaturated halogenated hydrocarbons, for example, vinyl chloride, vinyl fluoride, vinylidene chloride and vinylidene fluoride; vinyl aromatic compounds, for example, vinyl pyridine, and vinyl naphthalene; unsaturated esters, amides and nitriles; and N-vinyl compounds, for example, N-vinyl pyrrolidone, N-vinyl carbazole and N-vinyl caprolactam. Mention should also be made of polyvinylacetate and polyvinylalcohol.

As further possibilities, a polysiloxane copolymer may include repeating units derived from urethanes, ureas, urethane-ureas, amides, imides, amide-imides, epoxy compounds, and esters. Mention should also be made of alkyl resins and polyethers.

As particular examples of olefinic co-monomers may be mentioned such compounds as acrylic and methacrylic esters, amides and nitrile derivatives, and vinyl chloride. Acrylate and methacrylate esters may, for example, be derived from saturated alcohols containing 4-16 carbon atoms, such as the butyl, hexyl, octyl, decyl, dodecyl and hexadecyl esters. Mention should also be made of isobornyl acrylate and isobornyl methacrylate.

Advantageously, in a polysiloxane copolymer, at least 55% of the repeating units are siloxane repeating units. The proportion of siloxane repeating units is preferably at least 75%, especially at least 90%, and more especially at least 95%.

Mention may also be made of coatings (B) which are derived from polysiloxanes in admixture or conjunction with one or more organic polymeric materials. The polysiloxane content of such mixtures or combinations is advantageously at least 75% by weight, preferably at least 90% by weight and especially at least 95% by weight.

The other material(s) used in such mixtures or combinations may themselves carry functional groups which are curable with the unreacted silicon-containing functional groups on the initial coating, or may carry no such groups. In the case in which the other material(s) carry curable functional groups, those groups may be the same as those on the polysiloxane (which may itself comprise a mixture or combination of two or more polysiloxane materials, at least one of which is curable with the initial coating) or different functional groups may be employed.


The other material(s) used in admixture or conjunction with the polysiloxane(s) may themselves have fouling-inhibiting properties, but need not do so provided that the total coating (B) has such properties. Mention may be made in this connection of coatings (B) which are derived from polysiloxanes in admixture or conjunction with one or more fluorine-containing polymers.

Other polymeric fouling-inhibiting materials, especially fluorine-containing polymers, may also comprise copolymers or polymer mixtures or combinations, and the discussion above relating to polysiloxane systems is then applicable mutatis mutandis.

Subject to curability with the unreacted silicon-containing functional groups of the initial coating, the curable polysiloxane(s) or other material (B) may in principle contain any of the functional groups, which may be pendant and/or terminal, described above in connection with the initial coating as susceptible to condensation curing. Interference with latency is no longer a consideration, however, so that, for example, there are not the same disadvantages arising from the presence of silanol groups, and the polysiloxane or other material (B) is advantageously curable by virtue of such groups. Additionally or alternatively, the polysiloxane or other

material (B) may be curable by virtue of curable functional groups selected from aliphatic, aromatic and araliphatic ether, ester and oxime groups, which may be substituted or unsubstituted, or also trialkoxysilyl or hydrosilyl groups. A curable ether group may be, for example, an alkoxy group such as, for instance, methoxy or ethoxy. An example of a curable ester group is acetoxy.

Thus, by way of preferred example, a curable polysiloxane may be curable by virtue of oxime groups of the formula



in which R^4 and R^5 may be the same or different and each represents a straight-chain or branched, saturated or unsaturated, aliphatic hydrocarbon radical, preferably having up to 7 carbon atoms, more especially up to 4 carbon atoms, especially a methyl or ethyl group; an aromatic group, for example, a phenyl group; or an araliphatic group, for example, a benzyl group, or R^4 and R^5 together represent an alkylene group, or one of R^4 and R^5 represents hydrogen. A group R^4 and/or R^5 may be substituted or unsubstituted.

Oxime-functional polysiloxanes may be prepared by reaction of the corresponding hydroxy-functional siloxane with a ketiminoxysilane, for example, methyl tris(methyl-ethylketiminoxy) silane, or one or more of the following ketiminoxysilanes:

$\text{CH}_3\text{Si} [\text{ON} = \text{C}(\text{CH}_3)_2]_3$, $\text{CH}_3\text{Si} [\text{ON} = \text{C}(\text{CH}_3)\text{C}_2\text{H}_5]_3$,
 $(\text{CH}_2 = \text{CH})\text{Si} [\text{ON} = \text{C}(\text{CH}_3)\text{C}_2\text{H}_5]_3$, $\text{C}_6\text{H}_5\text{Si} [\text{ON} = \text{C}(\text{CH}_3)_2]_3$,
 $\text{CH}_3\text{Si} [\text{ON} = \text{C}(\text{C}_2\text{H}_5)(\text{CH}_2)_3\text{CH}_3]_3$,
 $(\text{CH}_3)_2\text{C} = \text{NOSi} [\text{ON} = \text{C}(\text{CH}_3)\text{C}_2\text{H}_5]_3$
 $\text{CH}_3\text{Si} [\text{ON} = \text{C}(\text{CH}_2)_4]_3$,
 $\text{CH}_3\text{Si} [\text{ON} = \text{C}(\text{CH}_2)_5]_3$,
 $\text{Si} [\text{ON} = \text{C}(\text{C}_2\text{H}_5)(\text{CH}_3)]_4$ or $\text{Si} [\text{ON} = \text{C}(\text{CH}_3)_2]_4$.

Preferred polysiloxanes are linear polymers and advantageously have the structure $R^3O(SiR^1R^2O)_nR^3$, in which R^1 and R^2 , which may be the same or different on each silicon atom and on different silicon atoms in the polymer, each represents an alkyl group such as, for example, methyl, ethyl, or propyl; an alkenyl group such as, for example, vinyl or allyl; a cycloalkyl or cycloalkenyl group; an aryl group such as, for example, phenyl; or a halogenated or cyano-substituted hydrocarbon group, with the proviso that one of R^1 and R^2 may represent hydrogen on some or all of the silicon atoms and that R^1 and R^2 may each represent hydrogen on some of the silicon atoms, OR^3 represents a curable functional group in which R^3 represents a monovalent radical such as, for example, hydrogen, alkyl, aryl or R^4R^5CN where R^4 and R^5 are as hereinbefore defined, and n represents a degree of polymerisation. Preferably R^1 and R^2 are each methyl, although partial or total replacement of R^2 by phenyl may be of advantage.

It is generally advantageous for at least some and preferably all curable functional groups in a polysiloxane material (B) to be bonded directly to silicon.

The polysiloxane or other material (B) may have a number-average molecular weight in the range of from 500, 1 000 or 1 500 to 310 000, generally from 1 800 to 80 000 or 85 000. Preferably, the number-average molecular weight is at least 5 000, advantageously at least 10 000, and more especially at least 15 000. The upper limit of molecular weight will usually be 60 000 or 70 000.

The polysiloxane or other material (B) preferably has a viscosity in the range of from 7.5 to 200 poise at 25°C. By way of illustration, it will in general be desirable to utilise a hydroxy-functional polysiloxane having a viscosity towards the upper end of the range,

whereas for an oxime-functional polysiloxane it will in general be desirable to utilise a material having a viscosity towards the lower end of the range.

Advantageously, a curing catalyst, optionally in conjunction with a co-catalyst, is used to promote the reaction of the curable polysiloxane or other material (B) with the unreacted functional groups on the initial coating. Examples of catalysts which may be used include the carboxylic acid salts of various metals, for example, tin, zinc, iron, lead, barium and zirconium. The salts are preferably salts of long-chain carboxylic acids, for example, dibutyltin dilaurate, dibutyltin dioctoate, iron stearate, tin (II) octoate and lead octoate. Further examples of suitable catalysts include organobismuth and organotitanium compounds and organo-phosphates such as bis(2-ethyl hexyl) hydrogen phosphate.

Other possible catalysts include chelates such as, for example, dibutyltin acetoacetate.

As a further possibility, the catalyst may comprise a halogenated organic acid, which has at least one halogen substituent on a carbon atom which is in α -position relative to the acid group, and/or at least one halogen substituent on a carbon atom which is in β -position relative to the acid group, or a derivative which is hydrolysable to form such an acid under the conditions of the condensation reaction.

Where appropriate in the following description, references to the acid catalyst include references to hydrolysable derivatives thereof.

The acid catalyst may be a mono-, di- or polybasic acid, but is preferably a monobasic acid.

The acid catalyst is a protonic acid and may comprise one or more carboxylic and/or sulphonic acid groups, preferably one or more carboxylic acid groups.

The or each halogen substituent may be fluorine, chlorine or bromine, but is preferably chlorine.

Advantageously, on an α - and/or a β -carbon atom of the acid catalyst, there are one or two fluorine substituents, from one to three chlorine substituents, or three bromine substituents. Thus, for example, the acid catalyst may comprise dichloroacetic acid, trichloro-
5 acetic acid or tribromoacetic acid.

The acid is advantageously an aliphatic acid, but may comprise one or more aromatic groups, such as phenyl or substituted phenyl, provided that there is preferably
10 no aromatic group attached to the α -carbon atom or bonded directly to the acid group. An aromatic group may be a heterocyclic group, such as pyridyl or pyrrolyl. An aliphatic acid may be a cyclic or, preferably, an acyclic acid.

Advantageously, the catalyst is a halogenated
15 alkanolic acid having up to 5 carbon atoms or a hydroxy-substituted derivative of such an acid.

As examples of acid derivatives which are hydrolysable to form the acids under the conditions of the
20 condensation reaction there may be mentioned anhydrides, for instance, trichloroacetic acid anhydride, and esters, which may be hydrocarbyl esters, especially methyl esters, or alkyl silyl esters, advantageously C_{1-4} alkylsilyl esters, especially methylsilyl esters. Thus,
25 for example, the catalyst may comprise trimethylsilyl-trichloroacetate.

If the catalyst contains more than one acid group, there may be halogen substitution on each α - and/or β -carbon atom or on only some of those carbon atoms.

30 The acid catalyst may carry one or more other substituents in addition to the specified halogen substitution.


The acid catalyst may be used alone or in
conjunction with one or more other such catalysts but
35 in the absence of any metal salt catalyst of the kind previously proposed. In particular, acid catalysts of

the invention offer the possibility of dispensing with tin-based catalysts such as dibutyltin dilaurate.

The proportion of catalyst may be in the range of from 0.01 to 5% by weight, based on the amount of polymer (B), preferably at least 0.05% by weight and advantageously not exceeding 2% by weight.

It may be necessary or desirable to use a cross-linking agent for the curing reaction.


Advantageously, a cross-linking agent comprises a functional silane, more especially a functional silane of the formula



in which the groups represented by R^1 to R^4 may be the same or different and, subject to there being at least di-functionality, each may comprise a straight-chain or branched, saturated or unsaturated, aliphatic hydrocarbon radical, preferably having up to 7 carbon atoms, more especially up to 4 carbon atoms, or an aromatic or araliphatic hydrocarbon radical, such as, for example, phenyl or benzyl, or an aliphatic or aromatic other group, such as an alkoxy, phenoxy or benzyloxy group, or an ester group. An aliphatic group R^1 to R^4 is preferably an alkyl group, advantageously a C_1 - C_4 alkyl group, preferably a methyl or ethyl group, and an alkoxy group R^1 to R^4 is advantageously C_1 - C_4 alkoxy, preferably methoxy or ethoxy. Preferred examples of alkoxysilanes of the formula (I) include tetraalkyl orthosilicates such as tetramethyl, -ethyl, -propyl or -butyl orthosilicate, dimethoxydimethyl silane and diethoxydimethyl silane. It will be appreciated that, in order to serve as a cross-linking agent, a compound of formula (I) must be at least difunctional and preferably at least tri-functional. Any of the groups R^1 to R^4 in formula (I) may be


unsubstituted or may be substituted by one or more substituents selected, for example, from halogen (especially chlorine or fluorine), amino groups or alkyl groups, which may themselves be substituted or unsubstituted.

Alternatively, a functional silane cross-linking agent may be reactive by virtue of one or more oxime groups of the formula



in which R^4 and R^5 may be the same or different and each represents a straight-chain or branched saturated or unsaturated, aliphatic hydrocarbon radical, preferably having up to 7 carbon atoms, more especially up to 4 carbon atoms, especially a methyl or ethyl group; an aromatic group, for example, a phenyl group; or an araliphatic group, for example, a benzyl group, or R^4 and R^5 together represent an alkylene group, or one of R^4 and R^5 represents hydrogen. A group R^4 and/or R^5 may be substituted or unsubstituted.

Thus, the functional silane may be a ketiminoxy-silane, for example, methyl tris(methylethylketiminoxy) silane, or one or more of the following ketiminoxy silanes:

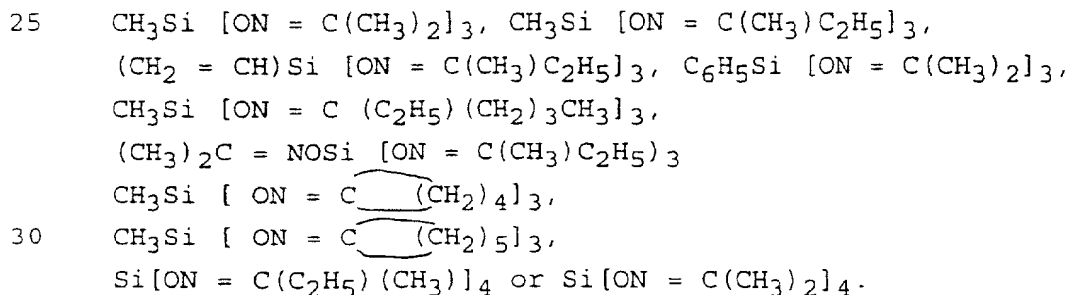


Other possible cross-linking or curing agents include oximes such as vinyltris(methylethylketoxime) or methyltris(methylethylketoxime).

As a further possibility, more particularly when organometallic catalysts are used, especially tin-based

catalysts, a cross-linking or curing agent may comprise a cyclic compound of the following formula:

5



10 in which n is an integer of from 3 to 10, and R represents hydrogen or methyl. Such materials are less preferred, however, because of the possibility of foaming arising from hydrogen evolution on curing.

15 A silane cross-linking agent may in principle be incorporated in a monomeric form or in the form of a self-condensation product, which may be, for example, a dimer, trimer, heptamer or a low molecular weight polymer.

20 The proportion of cross-linking agent may be in the range of from 0.05 to 10% by weight, generally from 2 to 5% by weight, based on the amount of polymer (B).

25 The process for forming the initial coating and for applying the subsequent layer of curable polysiloxane or other material (B) is most conveniently carried out using a solution of the corresponding material in a non-reacting volatile solvent. Suitable solvents include aromatic hydro-carbons, for example toluene, xylene and trimethylbenzene; alcohols, for example, butanol; ketones, for example 4-methylpentan-2-one (methyliso-butylketone), 5-methylhexan-2-one (methylisoamylketone)
30 and cyclohexanone; esters, for example butyl acetate and 2-ethoxyethyl acetate, and mixtures of the above with one another or with an aliphatic hydrocarbon, for example in the form of white spirit. Such solutions can be applied to the surface to be coated by any of the known methods
35 such as brush-painting, roller-painting, spray-painting and using aerosol formulations. In order to minimise the

use of solvent on both cost and environmental grounds, it is advantageous to use as concentrated a solution as possible which is compatible with the coating technique employed. A solution of the coating composition comprising components (A) or (B), as the case may be, may comprise at least 35% by weight solids, generally at least 50% by weight solids. More concentrated solutions, for example containing at least 70% solids, may be employed if the polymer component (A) is of low molecular weight. In principle, the maximum solids content may be as high as 90% by weight or even more, but in general the maximum practicable solids content will be in the range 75-85% by weight, typically 80% by weight.

The presence of water is in general required in order to achieve full cure in the process of the invention, but specific addition of water is not normally required, either during or after application of the polysiloxane. It will in general be found that atmospheric moisture is sufficient to induce curing, and it will not normally be necessary or appropriate to heat the applied polysiloxane for curing purposes.

It is preferable to take steps to minimise the water content of all ingredients of the initial coating formulation and also the polysiloxane formulation, and it will be appreciated that no water or aqueous material should be added. Thus, for example, commercially available solvents will frequently contain a small amount of water (say, 1-2% by volume) and it is preferable to reduce the water content of such materials before use. In principle, such reduction in water content may be achieved by distillation in conjunction with a drying agent such as, for example, sodium, sodium hydride or calcium hydride or anhydrous calcium sulphate, but advantageously a reactive water-scavenger is used, for example, an inorganic salt such as, for example, magnesium sulphate (followed by filtration) or a mono-

or di-functional silane, for instance, ethoxytrimethyl silane.

5 A coating composition comprising polymer (B) may include one or more unreactive oils such as, for example, a silicone oil, especially a methylphenyl silicone oil such as that sold by Rhone-Poulenc under the trademark "Rhodorsil Huile 550" or a petroleum or polyolefin oil or a polyaromatic oil. A preferred example is petrolatum oil.

10 The proportion of unreactive oil(s) may be in the range of from 5 to 25% by weight, based on the amount of component (B), preferably up to 10% by weight.

15 The initial coating may be a clear, transparent material or may be pigmented or dyed, provided that any pigment or dye used does not detract unduly from the desired latency (as a result, for example, of high moisture content or surface acidity or basicity). The pigment volume concentration in the coating formulation may typically be in the range of from 0.5 to 25%.
20 Particular mention may be made, for instance, of the use of metallic flake materials (for example, aluminium flake) or other so-called barrier pigments; also anti-corrosive pigments.

25 The curable polysiloxane or other material (B) may likewise be clear, pigmented or dyed, and either or both layers may incorporate other excipients and/or fillers such as barium sulphate or other mineral fillers, pyrogenic silica, bentonite or other clays.

30 Depending on reactivities, a coating formulation comprising the curable polysiloxane(s) can in principle be packaged in a one-, two or three-pack system. The initial coating formulation can be applied simply and easily as a one-pack system.

35 The thickness of the initial coating layer when dry may be in the range of from 50 to 100 microns, and the thickness of the layer comprising cured polysiloxane may

be in the same range. More than one of each layer may be applied if desired.

The substrate can be any material that is to be used in a fouling, especially aquatic, environment.

5 Thus, for example, the substrate may be metal, for instance, steel or aluminium; wood; concrete; a fibre-reinforced resin such as, for instance, a polyester resin; or another plastics material. A known anti-corrosive coating (such as, for instance, an epoxy, vinyl
10 or alkyd coating) may be applied to the substrate before application of the initial coating formulation.

The initial layer applied in accordance with the invention can be formulated as a combined tie-coat and sealer.

15 A particular advantage of the invention is that the initial coating can be applied successfully over a range of worn or damaged anti-fouling coatings, especially if suitable barrier or anti-corrosive pigments are used, thereby avoiding a time-consuming and (in the case of
20 toxic anti-fouling materials) potentially hazardous operation. In general, the only surface preparation needed before application of an initial coating according to the invention is a high-pressure fresh water wash.

Examples of anti-fouling coatings to which an
25 initial coating according to the invention can be applied include self-polishing tin copolymers, rosin Laroflex and rosin acrylic. Low surface-energy systems such as silicones and fluoropolymers do not provide a sound base on which to apply an initial coating according to the
30 invention.

Further important advantages are that the sequential application of layers according to the process of the invention is a simpler, more flexible and more controllable procedure than is offered by complex systems
35 designed to produce outer siloxane-rich regions (such as WO 93/13179).

By appropriate selection of various parameters as described herein, especially the nature and content of the functional groups providing latent reactivity, the initial layer composition in the process of the invention can be designed to permit a relatively long time interval between the application of the separate layers.

The following Examples illustrate the process of the invention:

Example 1

A glass-reinforced plastics (GRP) substrate bearing a coating of aged anti-fouling material (self-polishing tin copolymer, rosin Laroflex or rosin acrylic) is cleaned by high-pressure washing and allowed to dry.

A first coating formulation is applied to the washed substrate by brushing and roller-coating and allowed to dry to give an initial layer of average thickness 75 microns having latent reactivity by virtue of unreacted functional groups derived from the coating formulation.

Before exhaustion of the latency period provided by the unreacted functional groups, a second coating formulation, comprising a curable organopolysiloxane or a curable fluorinated acrylic polymer, is applied to the initial layer and cured to give an adherent anti-fouling layer of average thickness 75 microns.

The composition of the first coating formulation is as follows:

Parts by weight:

Acrylic polymer A	54.7
Xylene	7.5
Bentone	2.9
Talc	16.7
Black iron oxide	2.9
Aluminium flake	13.0
Methyl isobutyl ketone	2.3

The latency period provided by the initial layer

formed from this composition is determined in a preliminary experiment, in which test portions of the curable organopolysiloxane composition are applied at a series of different time intervals to different test areas of the initial layer. The latency period is taken to be the maximum time interval, under the prevailing conditions of temperature and humidity (after application of the initial layer) at which satisfactory adhesion of the polysiloxane coating is still achieved.

Examples 2-8:

The process of Example 1 is repeated using the different initial coating compositions set out below. The same GRP substrate is used except where indicated.

Example 2:

	<u>Parts by weight</u>
Acrylic polymer A	67.0
Xylene	10.1
Bentone	1.6
Talc	9.3
Black iron oxide	1.6
Aluminium flake	7.2
Methyl isobutyl ketone	3.2

Example 3:

	<u>Parts by weight</u>
Acrylic polymer A	91.5
Xylene	8.5
<u>Substrate:</u>	gel-coated GRP (no previous anti-fouling treatment), primed with an epoxy anti-corrosive composition.

Example 4:

		<u>Parts by weight</u>
	Acrylic polymer A	54.7
	Xylene	7.5
5	Bentone	2.9
	Talc	16.7
	Black iron oxide	2.9
	Aluminium flake	13.0
	Methyl isobutyl ketone	2.3

10

Example 5:

		<u>Parts by weight</u>
	Acrylic polymer B	67.0
	Xylene	10.1
15	Bentone	1.6
	Talc	9.3
	Black iron oxide	1.6
	Aluminium flake	7.2
	Methyl isobutyl ketone	3.2

20

Example 6:

		<u>Parts by weight</u>
	Acrylic polymer B	91.5
	Xylene	8.5
25	<u>Substrate:</u>	wood (no previous anti-fouling treatment), primed with an anti-fouling primer.

Example 7:

		<u>Parts by weight</u>
	Epikote 1001 Adduct	54.7
	Xylene	7.5
	Bentone	2.9
	Talc	16.7
35	Black iron oxide	2.9

30

Aluminium flake	13.0
Methyl isobutyl ketone	2.3

Example 8:

5		<u>Parts by weight</u>
	Epikote 1001 Adduct	91.5
	Xylene	8.5
	<u>Substrate:</u>	bare concrete (no previous anti-fouling treatment),
10		primed with an epoxy anti-corrosive composition.

The acrylic polymer A used in the Examples is derived from the following monomers:

15		<u>Parts by weight:</u>
	Methoxyethylacrylate	306.6
	Methylmethacrylate	715.3
	Trimethoxysilylpropylmethacrylate	283.2
20	Mercaptopropyltrimethoxy silane	56.0

The acrylic polymer A is prepared as follows:-

Trimethylbenzenes (540.0g) are added to a 3 litre flange-topped reaction vessel, fitted with mechanical stirrer, temperature probe, water condenser and feed inlet. A monomer feed is prepared, made up from monomers and radical initiator Azobis(isobutyronitrile) (AIBN, 23.4g). The reaction vessel is heated to 100°C under a slow stream of nitrogen and the feed added over a 3 hour period. During the addition, the temperature is maintained at 100°C using a temperature control unit. Upon completion of the monomer feed, the solution is maintained at 100°C for 30 minutes after which time a boost of AIBN (7.8g) in trimethylbenzenes (30g) is added in one shot. After stirring the solution at 100°C for 45 minutes, a second identical boost is added and the

solution stirred for a further 1 hour before being allowed to cool.

	% Solids (Theor.)	=	70%
	Tg (Theor.)	=	39.1°C
5	Molecular Weight (Mn)	~	3000

The acrylic polymer B used in the Examples is derived from the following monomers:

		<u>Parts by weight:</u>
10	Butylacrylate	198.2
	Methylmethacrylate	757.0
	Triisopropoxysilylpropylmethacrylate	393.1

The acrylic polymer B is prepared analogously to acrylic polymer A, and has Tg (Theor.) = 36.7°C and molecular weight (Mn) ~ 10 000.

The epoxy adduct I used in the Examples is obtained from 966.2 parts by weight of Epikote 1001 (a condensation product of bisphenol A and epichlorohydrin) and 33.8 parts by weight of mercaptopropyltrimethoxysilane. The adduct is prepared by the following procedure:- Ethanol (1000.0g) and Epikote 1001 are added via a wide neck funnel to a 3 litre flange-topped reaction vessel, fitted with mechanical stirrer, temperature probe and water condenser. A white emulsion is formed on stirring and heating to reflux (ca. 78°C). Mercaptopropyltrimethoxy silane is then added drop-wise via a peristaltic pump over a period of 4 hours. After addition of the silane, the reaction is allowed to proceed at reflux for a further 1 hour, or until the reaction is complete as determined by ¹³C NMR.

The solution is allowed to cool to ca. 50°C and CB30 (428.0g) is added. The flask is fitted with still head and distillation take-off apparatus, and all the low boiling solvent (ethanol:methanol ca 85.15) removed at low temperature (still head ca. 40°C) under reduced

pressure (ca. 600 mmHg).

% Solids (Theor.)	=	70%
Tg (Theor.)	=	38.9°C

5 An alternative epoxy adduct II may be obtained analogously from 900.0 parts by weight of Epikote 1004 (a condensation product of bisphenol A and epichlorhydrin) and 100.0 parts by weight of mercaptopropyl-dimethoxymethyl silane.

10	% Solids (Theor.)	=	60%
	Tg (Theor.)	=	61.9°C

15 The latency period provided by acrylic polymer A and the epoxy adduct I is up to 7 days; the latency period provided by acrylic polymer B and the epoxy adduct II is up to 2 weeks.

20 Coating formulations for forming the second coating in the Examples are as follows:

a) One-pack formulation

	<u>Parts by weight</u>
25 α,ω -hydroxy functional dimethyl siloxane (viscosity 35 poise)	55.00
Methyltrimethoxy silane	2.50
Airflow silica (Aerosil)	2.20
Titanium ethylacetoacetate	1.00
Trimethylbenzenes	29.40

30

b) Two-pack formulation

	<u>Parts by weight</u>
<u>Base</u>	
35 α,ω -hydroxy functional dimethyl siloxane (viscosity 35 poise)	100.00
Air floated silica (Aerosil)	8.00

Methyltris (methylethylketoxime) silane	6.00
<u>Catalyst Solution</u>	
Trimethylbenzenes	15.00
Dibutyltindilaurate	0.08

5

c) Two-pack formulationParts by weightBase

Fluorinated acrylic polymer C	70.00
10 Trimethylbenzenes	30.00
<u>Catalyst Solution</u>	
Trimethylbenzenes	15.00
Dibutyltindilaurate	0.08

15 The fluorinated acrylic polymer C is derived from following monomers:

Parts by weight

Butylacrylate	57.10
Methylmethacrylate	92.9
20 Trimethoxysilylpropylmethacrylate	32.10
Pentafluoropropylmethacrylate	19.40

The fluorinated acrylic polymer C is prepared analogously to acrylic polymer A, except that there is no chain transfer agent and the quantity of trimethyl
 25 benzenes is 90.00 parts by weight, the quantity of the radical initiator AIBN is 5.10 parts by weight in the main monomer feed and 1.70 parts by weight in each boost.

% Solids (Theor.)	=	70%
Molecular weight (Mn)	=	8000

30

d) Three-pack formulationParts by weightBase

35 α,ω -hydroxy functional dimethyl siloxane (viscosity 35 poise)	56.00
Air floated silica (Aerosil)	1.70

	Silicone oil (Rhodorsil RP550)	4.10
	Trimethylbenzenes	11.10
	<u>Curing agent</u>	
	Tetraethylorthosilicate	2.60
5	Silicone oil (Rhodorsil RP550)	0.80
	Trimethylbenzenes	8.50
	<u>Catalyst Solution</u>	
	Dibutyltin dilaurate	0.55
	Trimethylbenzenes	14.20


CLAIMS

1. A process for inhibiting the fouling of a substrate in a fouling environment, which comprises forming on the substrate, before exposure to the said environment, a coating comprising a film-forming polymer (A) carrying unreacted curable silicon-containing functional groups providing latent reactivity, and thereafter applying a layer comprising a curable polymeric fouling-inhibiting material (B) and bonding the applied layer to the said coating by a condensation curing reaction involving the unreacted functional groups thereon.

2. A process as claimed in claim 1 wherein the curable silicon-containing functional groups of (A) are pendant functional groups.

3. A process as claimed in claim 1 or 2, wherein the silicon-containing functional groups are curable by virtue of one or more curable functional groups selected from aliphatic, aromatic and araliphatic ether and oxime groups, which groups may be substituted or unsubstituted.


4. A process as claimed in claim 1 or claim 2, wherein the curable silicon-containing functional groups are groups of the formula



in which the groups represented by R_1 , R_2 and R_3 may be the same or different and each may comprise an ether or ester group, preferably a group including a straight-chain or branched alkyl moiety having from 1 to 4 carbon atoms, and in which one or two of R_1 to R_3 may represent hydrogen or a hydrocarbon group, preferably a straight-chain or branched alkyl group having from 1 to 4 carbon atoms.

5. A process as claimed in claim 1 or claim 2, wherein the silicon-containing functional groups are curable by virtue of one or more oxime groups of the

formula



5 in which R⁴ and R⁵ may be the same or different and each represents a straight-chain or branched, saturated or unsaturated, aliphatic hydrocarbon radical, preferably having up to 7 carbon atoms, more especially up to 4 carbon atoms, especially a methyl or ethyl group; an
10 aromatic group, for example, a phenyl group; or an araliphatic group, for example, a benzyl group; or R⁴ and R⁵ together represent an alkylene group; or one of R⁴ and R⁵ represents hydrogen.

6. A process as claimed in claim 1 or claim 2,
15 wherein the curable silicon-containing functional groups are trimethoxy silyl or methyl dimethoxysilyl groups.

7. A process as claimed in any one of claims 1 to 6, wherein the polymer (A) has no silanol or amine functionality.

20 8. A process as claimed in any one of claims 1 to 7, wherein the polymer (A) carries no functional groups other than the curable silicon-containing functional groups conferring latent reactivity.

25 9. A process as claimed in any one of claims 1 to 8, wherein at least a major proportion of the repeating units in the film-forming polymer (A) are other than siloxane repeating units.

30 10. A process as claimed in claim 9, wherein the proportion of siloxane repeating units in the film-forming polymer (A) is not more than 25%, preferably not more than 10%, and more especially not more than 5%.

11. A process as claimed in any one of claims 1 to 10, wherein the polymer (A) is substantially free from siloxane repeating units.

35 12. A process as claimed in any one of claims 1 to 11, wherein the polymer (A) is derived from one or

more monomers (A1) which carry curable silicon-containing functional groups and one or more monomers (A2) which do not carry such groups.

5 13. A process as claimed in any one of claims 1 to 12, wherein the polymer (A) is derived from one or more ethylenically unsaturated monomers.

14. A process as claimed in any one of claims 1 to 13, wherein the Tg of the polymer (A) is above ambient temperature.

10 15. A process as claimed in any one of claims 1 to 14, wherein the polymer (A) has a number-average molecular weight in the range of from 3 000 to 10 000.

15 16. A process as claimed in any one of claims 1 to 15, wherein the unreacted curable silicon-containing functional groups provide a period of latent reactivity of 48 hours or more.

17. A process as claimed in any one of claims 1 to 16, wherein the fouling-inhibiting material (B) is curable by virtue of silanol or silicon-alkoxy groups.

20 18. A process as claimed in any one of claims 1 to 16, wherein the fouling-inhibiting material (B) is curable by virtue of curable functional groups selected from aliphatic, aromatic and araliphatic ether, ester and oxime groups, trialkoxysilyl or hydrosilyl groups.

25 19. A process as claimed in any one of claims 1 to 18, wherein the fouling-inhibiting material (B) is a linear polymer.

30 20. A process as claimed in any one of claims 1 to 19, wherein the fouling-inhibiting material comprises a curable polysiloxane.

35 21. A process as claimed in claim 20, wherein the polysiloxane (B) has the structure $R^3O(SiR^1R^2O)_nR^3$, in which R^1 and R^2 , which may be the same or different on each silicon atom and on different silicon atoms in the polymer, each represents an alkyl group; an alkenyl group; a cycloalkyl or cycloalkenyl group; an aryl group;

or a halogenated or cyano-substituted hydrocarbon group, with the proviso that one of R^1 and R^2 may represent hydrogen on some or all of the silicon atoms and that R^1 and R^2 may each represent hydrogen on some of the silicon atoms,

OR³ represents a curable functional group in which R^3 represents a monovalent radical; and n represents a degree of polymerisation.

22. A process as claimed in any one of claims 1 to 19, wherein the fouling-inhibiting material comprises a curable fluorine-containing polymer.

23. A process as claimed in claim 22, wherein the fluorine-containing polymer comprises a fluoro-acrylate polymer.

24. A process as claimed in any one of claims 1 to 23, wherein the fouling-inhibiting material (B) has a number-average molecular weight in the range of from 5 000 to 85 000.

25. A process as claimed in any one of claims 1 to 24, wherein the fouling-inhibiting material (B) is applied in admixture or conjunction with a catalyst for the condensation curing reaction.

26. A process as claimed in any one of claims 1 to 25, wherein the fouling-inhibiting material (B) is applied in admixture or conjunction with a cross-linking agent for the condensation curing reaction.

27. A process as claimed in any one of claims 1 to 26, wherein the substrate has a worn or damaged anti-fouling coating thereon.

28. A process as claimed in any one of claims 1 to 27, wherein the fouling environment is an aquatic environment.

29. A process as claimed in claim 28, wherein the fouling environment is a marine environment.

30. A substrate in a fouling environment and bearing a coating and a cured fouling-inhibiting layer

THE

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FOULING INHIBITION

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED
Great Britain	9727261.1	12/23/1997	YES: X NO:
			YES: NO:

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL	FILING DATE

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section

112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS(patented/pend ing/abandoned)
PCT/GB98/03883	12/23/1998	Pending

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following as my attorneys of record, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent Office:

Louis A. Morris, Reg. No. 28,100
 Ralph J. Mancini, Reg. No. 34,054
 Joan M. McGillicuddy, Reg. No. 35,608

Richard P. Fennelly, Reg. No. 25,677
 David H. Vickrey, Reg. No. 30,697
 Lainie E. Parker, Reg. No. 36,123

Send Correspondence to:

Joan M. McGillicuddy
Akzo Nobel Inc.
Intellectual Property Department
7 Livingstone Avenue
Dobbs Ferry, New York 10522-3408

Direct Telephone Calls To:

Joan M. McGillicuddy
914-674-5463

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Trevor HAMILTON

Citizenship: British

Residence: Tyne & Wear, Great Britain

Post Office Address: 2 Parklands Way, Wardley Gateshead, Tyne & Wear
NE108YW, Great Britain

Inventor's Signature

Date

Citizenship: British

Post Office Address: 10 Southfork, Newcastle upon Tyne, Tyne and Wear

NE158TZ Great Britain

Date _____

Citizenship: British

Post Office Address: 22A Woolsington Gardens, Woolsington, New Castle upon

Tyne, NE13 8AR Great Britain

Date _____

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---